



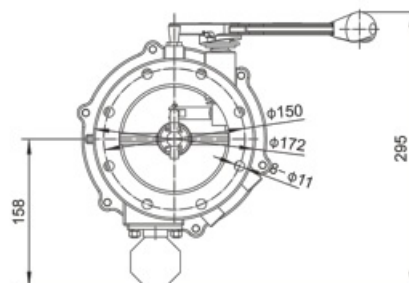


Oil Discharge Valve - installed at the bottom of the tank, using quick connection, can quickly unload oil, is an important part of the bottom of the discharge, upstream connected to the bottom valve.

Fitting Details



Part No : 514C4103-00
 Norminal Diameter: 100MM
 Connection: 8 × ϕ 11 × PCD150
 Nominal Pressure: 6Bar
 Design Tempreature: - 40°C ~ + 120°C
 Contact Part: CF8/CF8M
 Seal: FEP+ VITON

Part Drawing

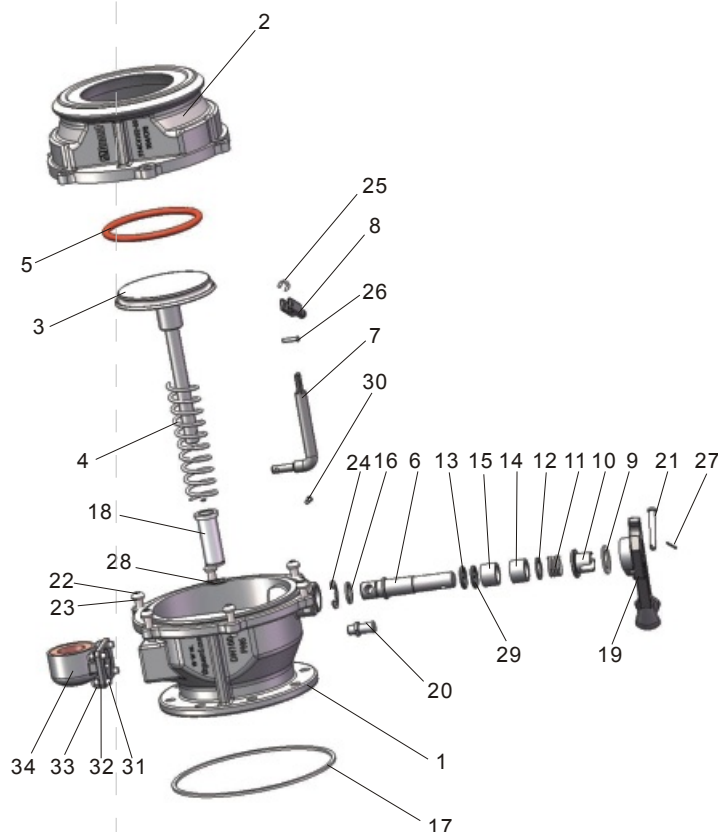

Item	Part No.	Description
1	514C4103-02	Body
2	514C4102-02	Adaptor
3	514C41-03	Presssure Plate
4	514C41-04	Spring
5	8536002093.5*7	O-ring
6	514C41-05	Valve Stem
7	514C41-06	Linkage Stem
8	514C41-07	Driven Stem
9	514C41-08	Gasket
10	514C41-09	Locating Bush
11	514C41-10	Spring
12	514C41-11	Gasket
13	8532000017*3.55	O-ring
14	514C41-12	Bearing
15	514C41-13	Spindle Packing
16	514C41-14	PTFE Gasket
17	514C41-15	Main Gasket
18	514C41-16	Bearing
19	514C41-17	Handle
20	514C41-18	Gear Lever
21	859864006*45	Hinge Pin
22	85988500M8*30	Screw
23	G859811008	Washer
24	8598190015	Ring
25	859819006	Ring
26	859864004*16	Hinge Pin
27	859860001.6*12	Split Pin
28	8598120018	Ring
29	8536002017.5*3.5	O-ring
30	859864004*14	Hinge Pin
31	85987000M6*20	Screw Bolt
32	859811006	Ring
33	85984400M6	Nut
34	514C41030100	Valve Mirror