


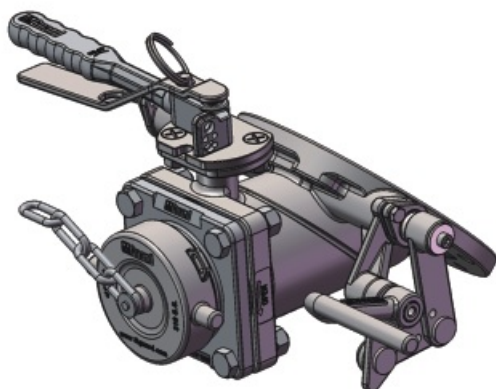

Integrated Speed Flow Bottom Discharge for butterfly valve and speed flow valve integrated valve. Inlet flange drilled $8 \times \phi 14\text{mm}$ holes equi -spaced on a PCD 178, Outlet flange drilled $4 \times \phi 14\text{mm}$ holes equi -spaced on a PCD 130. Option-Shutting-Off device for emergency and fusible link.

Fitting Details

Part No.: HDD48008-00

Connection:

Flange drilled $8 \times \phi 14 \times \text{PCD}178$

Outlet $4 \times \phi 14 \times \text{PCD}130$

Outlet : BSP/DC Camlock


Nominal Diameter: 80mm

Nominal Pressure: 4Bar

Design Temperature: $-40^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Contact Parts: CF8M

Seal: PTFE、VITON、FEP+Silicon

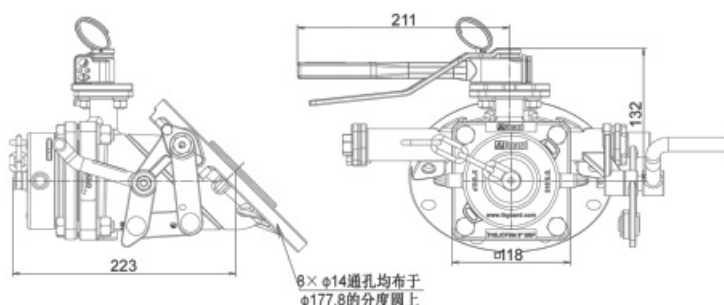

Part Drawing

