


3" 45° Quick Flow Foot Valve (Speical Cargos)-Inlet flange drilled $8 \times \phi 14\text{mm}$ holes equi -spaced on a PCD 178, Outlet flange drilled $4 \times \phi 17\text{mm}$ holes equi -spaced on a PCD 160. The fast flow bottom valve adopts full heating, which can realize the heating function of the valve body to the greatest extent. The main sealing gasket adopts imported o-ring covering.

Fitting Details

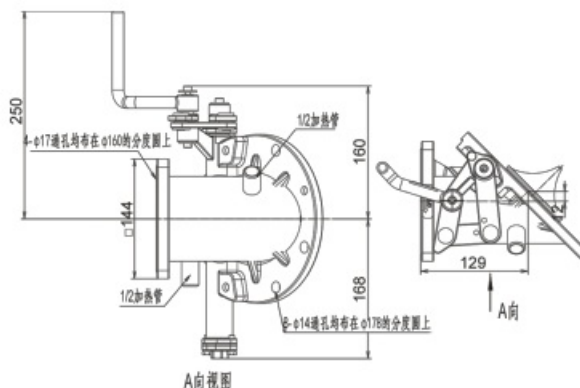

Part No.: JX468008-00

Connection:

Flange drilled $8 \times \phi 14 \times \text{PCD } \phi 178$

Outlet $4 \times \phi 17 \times \text{PCD } \phi 160$

Nominal Diameter: 78mm


Nominal Pressure: 4Bar

Design Temperature: $-20^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Contact Parts: CF8M

Seal: PTFE、FEP+Silicone、VITON

Part Drawing

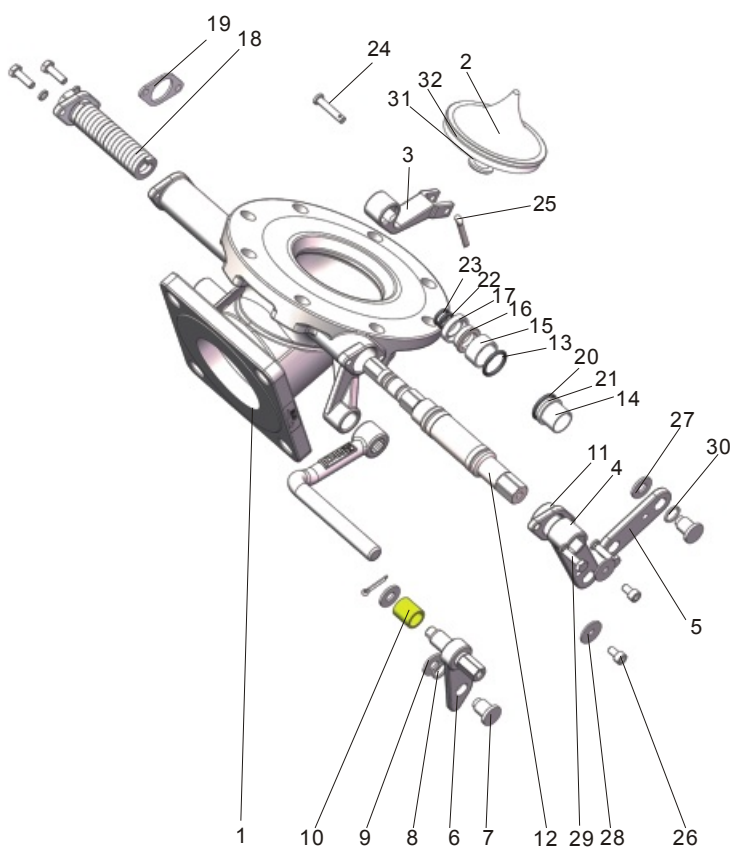

Item	Part No.	Description
1	JX468008-01-00	Body Assembly
2	JX468008-03	Solid Poppet
3	JX468001-03	Crank
4	JX468001-04	Connecting Link 1
5	JX468001-05	Connecting Link 2
6	JX468001-06	Connecting Link 3
7	JX468001-07	Hinge Pin
8	JX468001-08	Plain Washer
9	QKB04001-05	Air Valve Small Piece
10	JX468001-10	Bushing
11	JX468001-11	Stuffing Clamp
12	JX468001-12	Spindle
13	8536002020*2.6	O-Ring
14	JX468001-13	Bearing
15	JX468001-14	Bearing
16	JX468001-30	Bushing
17	JX468001-15	Taperde Washers
18	JX468001-26-00	Spring Assembly
19	JX468001-19	Seal Gasket
20	8561000021*2.6	O-Ring
21	8532000020*2.65	O-Ring
22	8561000011.5*2.6	O-Ring
23	8532000011.2*2.65	O-Ring
24	859964006*30	Hinge Pin
25	LS212501	Split Pin
26	85988100M6*10	Capscrew
27	JZ964C01-08	Plain Washer
28	859860002*14	Split Pin
29	85983300M6*20	Bolt
30	859811006	Spring Washer
31	JX468005-03	Solid Poppet
32	JX468008-02	O-Ring