

DN500 High Profile Manlid Assembly - 6 points. 8mm thick high profile neckring is stamped and formed in one piece. Various radii and sizes are available.

Stainless steel swing bolt with stainless steel nut. With custom lead seals, seal sold separately.

Option-The cover body has single-layer cover and double-layer cover structure optional, and the maximum opening angle is standard 135° and optional 120°.


Option - 8-point manlid assembly, test pressure 6Bar.




Part No.: R3563501-00
 Nominal Diameter: 500mm
 Design Pressure: 3Bar(43PSI)
 Test Pressure: 4.5Bar(65PSI)
 Points: 6
 Design Temperature: - 40°C ~ + 200°C
 Weight: 16kg
 Neckring Weight: 18.5kg

Temperature range depends on the seal.
 Neckring profiled to suit tank radius.

Fitting Details

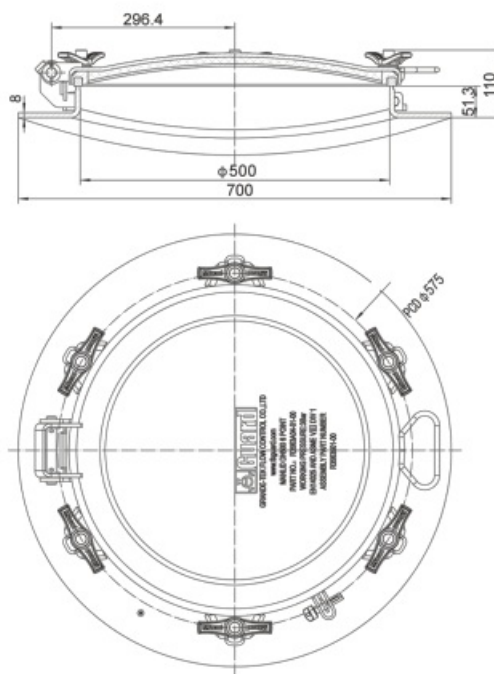

Part Drawing

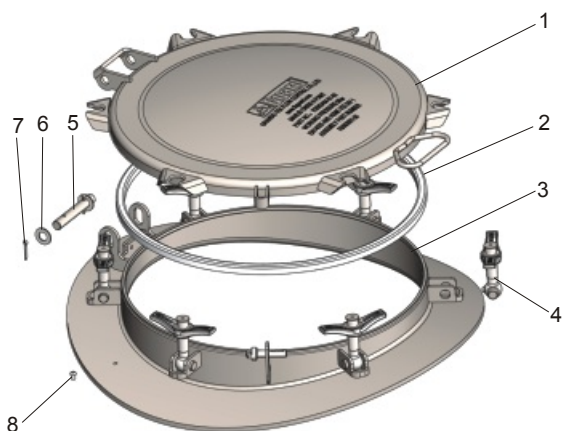

| Item | Part No. | Description |
|------|----------------|----------------|
| 1 | R3563A04-01-00 | DN460 Cover |
| 2 | 见密封件数据表 | Seal |
| 3 | R3563501-02-00 | DN500 Neckring |
| 4 | R4583A01-13-00 | Bolt Assembly |
| 5 | R4583A01-03 | Hinge Pin |
| 6 | R4583A01-12 | Gasket |
| 7 | 859960004*25 | Split Pin |
| 8 | 85988500M6*8 | Screw |